

DM2 Mk2


Stand-mount loudspeaker system

Product Summary

- The DM2 MK2 is a three-driver loudspeaker system of 47 litres capacity. It is a free-standing design, for use with B&W purpose-made accessories but will also incorporate well into existing furniture.
- The DM2 MK2 offers a wide horizontal dispersion and excellent vertical dispersion within a listening window of approximately 10° in the vertical plane and 40° in the horizontal.
- To take maximum advantage of this of this important design feature, the loudspeaker must be mounted vertically and located at the correct listening height or angled slightly to project the window in an upward direction.
- The pedestal stand or angled plinth caters for these two alternatives.

Technical highlights

- The bass driver is housed in a critically vented enclosure and has a crossover point of 400 Hz where the vent tuning is so designed to extend the low frequency half point to 45Hz.
- The mid band frequencies are handled by a 100mm unit housed in a separate enclosure – critically damped with long-haired natural wool.
- Frequencies above 3kHz are handled by a 25mm multi-filament weave polyester dome unit, critically damped with PVA compounds.

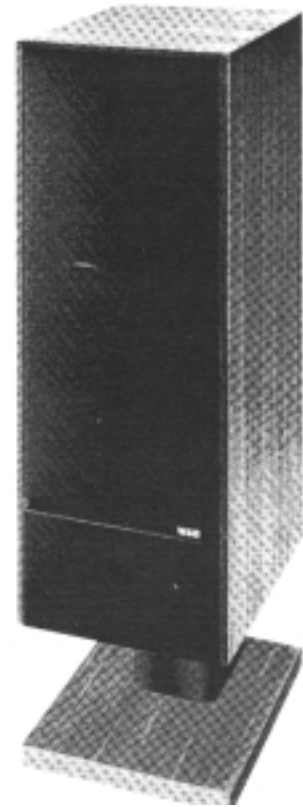

Drive Units	High-frequency driver: a 25mm multi-filament weave polyester dome unit, critically damped with PVA compounds Mid-range driver: a 100mm unit housed in a critically vented enclosure Bass Driver: housed in a critically vented enclosure	Sensitivity	9 volts into 8 ohms = 85dB at 1m
		Power Handling	25W – 200W
		Dimensions	Height: 710mm Width: 270mm Depth: 330mm
Frequency Response	50Hz – 18kHz ± 3dB, at centre of listening window		



LISTEN AND YOU'LL SEE