




configuring the **RR-1070** remote control

NOTE: Before using the RR 1070 remote control, it is recommended that the batteries be installed in the remote and the remote be connected to the AC charger provided. The RR 1070 can be used while attached to the charger and it is recommended it be connected to the charger for at least 10 hours to ensure maximum battery life.

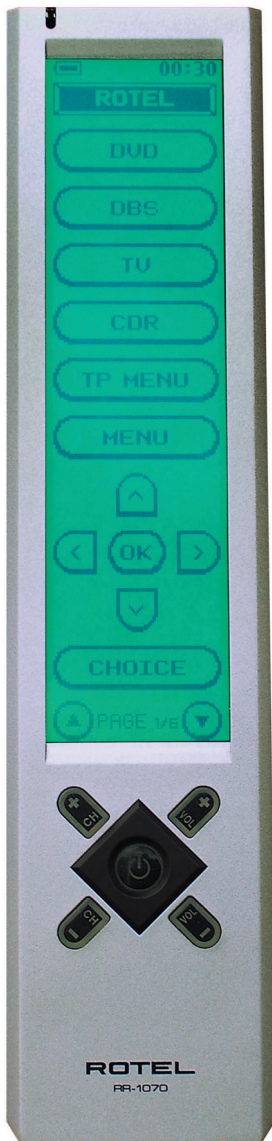

The RR 1070 can be configured for use with the RSDX 02 DVD Receiver with the following steps:

1. Briefly touch the LCD screen of the RR 1070 to display the HOME screen. (The black button at the top of the LCD screen should display HOME. If it does not, press the small HOME icon located at the bottom of the LCD screen.)
2. Press the MENU button located on the lower left corner of the LCD screen to display the Main Menu.
3. On the main menu, press the SETUP button.
4. From the Setup Menu, press the BRAND NAME button.
5. Press the ROTEL button as the Brand Name.
6. A list of Rotel models should now appear on the display. Press the Down arrow at the top of the LCD screen to scroll the list down. The RSDX 02 US should be listed at the top of the second page of Rotel models. Press the RSDX 02 US selection from the list.
7. Once the RSDX 02 US has been selected, the display will change to a test key page, allowing you to verify the correct model has been selected by testing the buttons. Press the OK button to exit this page. The display should list a confirmation message to acknowledge the setup is completed, and the RR 1070 will return to the Main Menu screen.
8. Press the HOME button to return to the Home screen, and choose the ROTEL button to enter the RSDX 02 remote control screen.
9. Press the DVD button on the first page of the RSDX 02 screen to complete the setup process.